


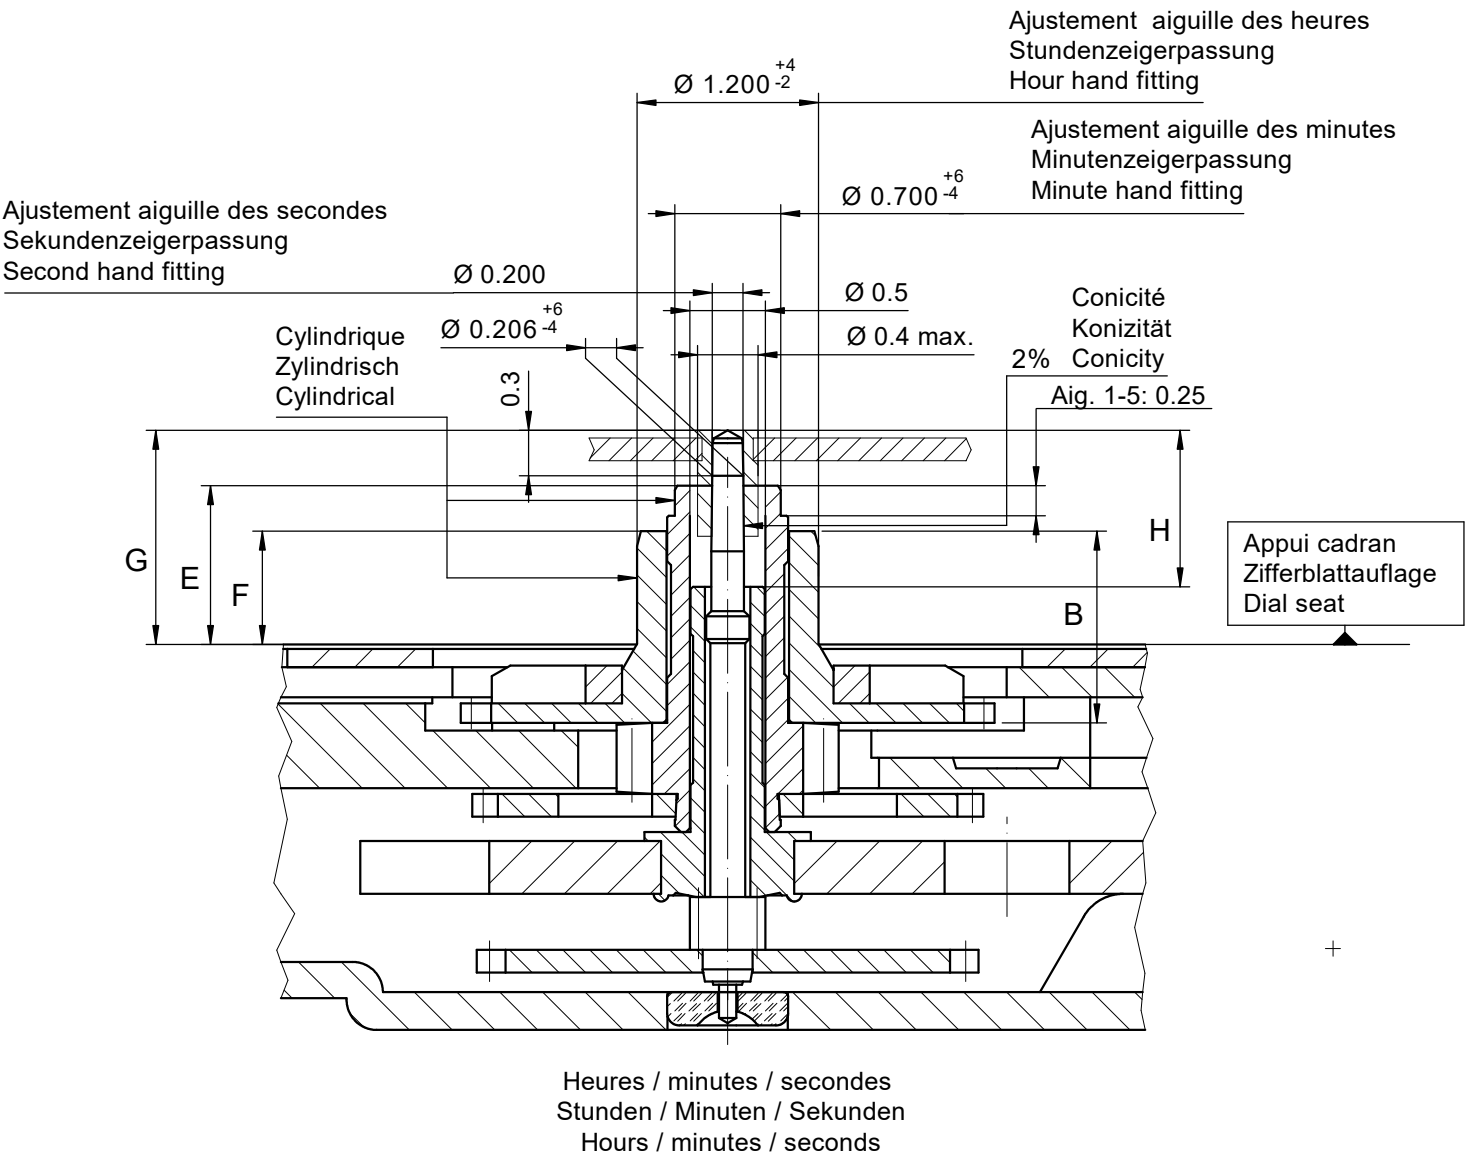

Aiguillage no Zeigerwerk­höhe Nr. Hand fitting height No	Dépassement Höhe über Zifferblattauf­lage Height over dial seat			Longueur Länge Length		Epaisseur max. (peinture comprise) Max. Dicke (inkl. Farbe) Max. thickness (paint included)			
	Pignon des secondes Sekundentrieb Second pinion	Chaussée Minutenrohr Cannon-pinion	Roue des heures Stundenrad Hour wheel	H	B	Cadran Zifferblatt Dial			Aiguilles Zeiger Hands
						Sous l'aiguille des secondes Unter Sekundenzeiger Under second hand	Sous l'aiguille des minutes Unter Minutenzeiger Under minute hand	Sous l'aiguille des heures Unter Stundenzeiger Under hour hand	
1	G	E	F	H	B	0.90	0.65	0.40	0.15
2	1.42	1.05	0.75	1.04	1.27	1.10	0.85	0.60	0.15
3	1.62	1.25	0.95	1.24	1.47	1.40	1.10	0.90	0.15
4	1.94	1.53	1.23	1.09	1.75	1.75	1.45	1.25	0.15
5	2.29	1.88	1.58	1.44	2.10	3.45	3.15	2.90	0.15
	3.95	3.55	3.24	1.59	3.76				

		Aig. des secondes Sekundenzeiger Second hand		Aig. des minutes Minutenzeiger Minute hand	Aig. des heures Stundenzeiger Hour hand	Lors de la pose d'aiguilles, le mouvement doit être soutenu. Beim Zeigersetzen muss das Werk abgestützt werden. The movement needs to be supported for hand setting.
		775, 785	705, 715, 715Li	Alle/Tous/All		Kaliber/Calibre/Caliber
mg	max.	10	10	30	30	Masse / Masse / Weight *
µNm	max.	0.05	0.05	0.70	0.70	Balourd / Unwucht / Unbalance *
gmm ²	max.	0.2	0.4	-	-	Inertie / Massenträgheit / Inertia *
N	max.	30	30	40	40	Force de chassage / Aufpresskraft / Force

Aiguillages
Zeigerwerkhöhen
Hand fitting heights

7¾", 8¾"
10½", 11½"

RONDA 775, 785, 705, 715, 715Li

Issued	09.08.1990	rh
Modified	10.01.2025	JK5228
Released	YES	
Mod. No.	48942	
Tolerance	µm	
Scale	10 : 1	Page 1/1 A3
Sous réserve de modifications Änderungen vorbehalten Modifications reserved		
No.	3316.030	16

* En cas de données différentes, veuillez contacter le service après-vente * Bei abweichenden Werten, bitte technischen Kundendienst anfragen * In case of different values, please contact the customer service