
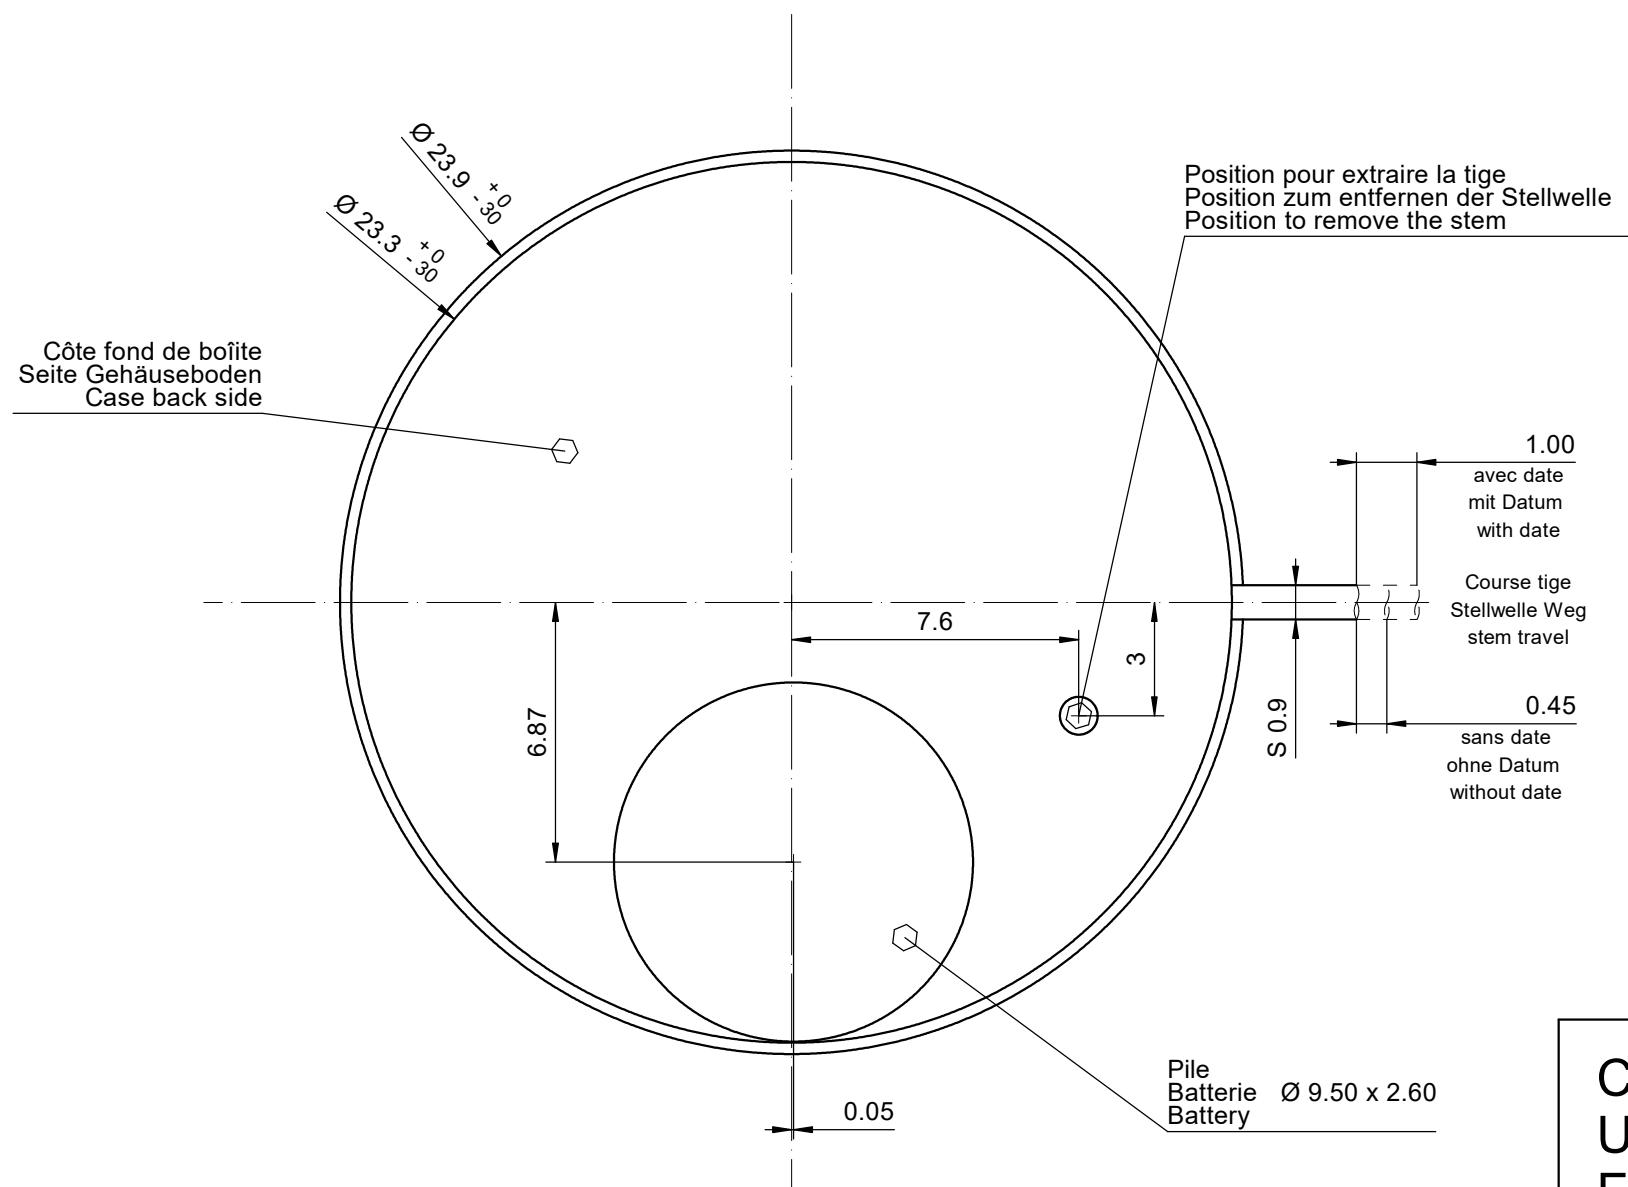


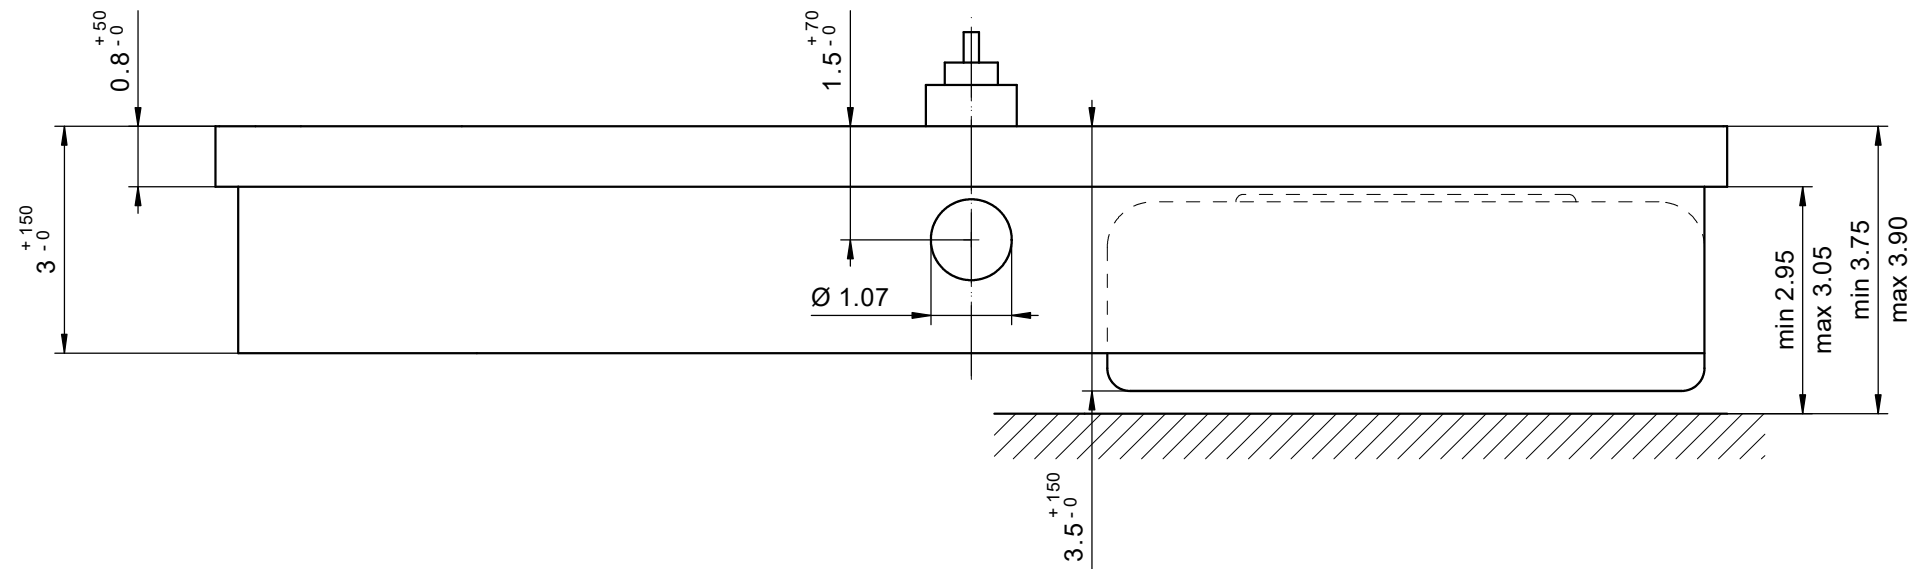

Sécurité entre aiguille seconde et verre : min 0.30 mm
Sicherheit zwischen Sekundenzeiger und Glas : min 0.30 mm
Security between second hand and glass : min 0.30 mm

Le cadran doit être maintenu en hauteur par la boîte.
Das Zifferblatt muss in der Höhe vom Gehäuse festgehalten werden.
The dial must be held in the height by the case.

Cage Uhrwerkgestell 10½" Frame		Issued	10.03.1999	gd
		Modified	27.03.2025	dh5221
		Released	YES	
		Mod. No.	49122	
		Tolerance	---	
		Scale	10 : 1	Page 1/1 A3
RONDA	502, 503, 503S, 505, 505S, 507, 509	Sous réserve de modifications Aenderungen vorbehalten Modifications reserved		
		No.	5000.290	08